

Millett

RED DOT SCOPES





**SP-1 / SP-2
& Multi-Dot**

Instruction Manual

Lit. #: 92-0028 / 08-10

Standard Models

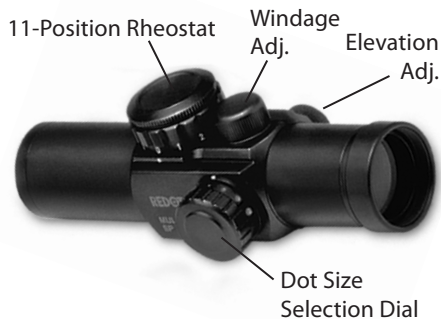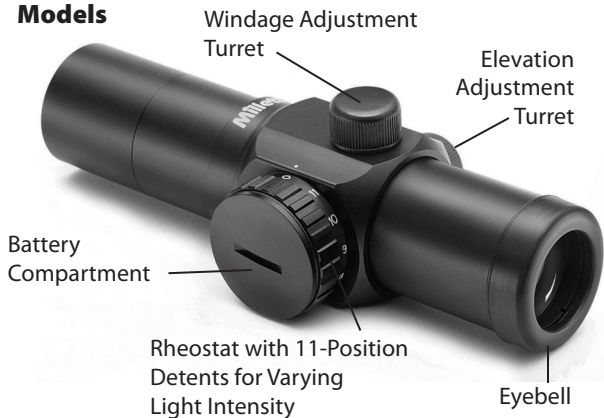

Multi-Dot Models

Congratulations on purchasing your Millett Red Dot illuminated optical sight. Designed with a unique rheostat that features 11 positive detents for a full range of light intensities, this is a state-of-the-art scope designed for hunting, plinking and target shooting with pistols, rifles, shotguns and bows.

Engineered for greater speed and accuracy, this scope allows you to unconsciously concentrate on the reticle, thus increasing accuracy. Millett's Red Dot illuminated reticle has been pre-focused so the aiming point always appears against the target. By comparison, open sights force you to focus on the rear sight, front sight and target at the same time. Also standard rifle or pistol scopes bring the target into focus only on the internal reticle.

Its aiming system is engineered to be the brightest of its kind. All in all, this scope is proof positive that Millett is positioned squarely on the leading edge of advanced technology.

**CAUTION! BE SURE GUN IS NOT LOADED.
USE SAFE GUN HANDLING PROCEDURES AT ALL TIMES.**

MOUNTING YOUR RED DOT SCOPE

1. The base or bases should be manufactured specifically for your pistol, rifle or shotgun and should create a uniform horizontal and vertical mounting platform. Be sure they are properly installed and securely fastened according to the manufacturer's instructions for your safety. There is no set eye relief for this sight, therefore, you should provide at least three inches of clearance between the eyeball and your eye when in the shooting position.
2. Set the clamps onto the base or bases so that they align with the crosscut grooves. Work each clampscrew into the base until the crossbolt seats into the groove. Securely tighten each locking nut with a coin or screwdriver. For additional holding power, add a drop of thread-locking compound to the center of each locking nut.

INSTALLING BATTERIES

Your new Millett Red Dot is powered by one 3V "coin-style" lithium battery, Type 2032 (included). Should your reticle grow dim or not light at all, you will need to replace the batteries. To install new batteries, unscrew the battery compartment and insert "+" side up. Replace battery cover.

ZEROING YOUR RED DOT SIGHT

NOTE: THE FOLLOWING SHOULD BE DONE AT AN APPROVED RANGE OR OTHER SAFE AREA. EYE AND EAR PROTECTION IS RECOMMENDED.

1. Activate the illuminated reticle by turning the rheostat knob clockwise to brighten and counterclockwise to dim. The "1" represents the dimmest and the "11" the brightest illumination levels.
2. Remove the windage and elevation adjustment caps.
3. With the scope mounted, rest the gun on a solid support. Sight along the barrel and aim at a target 50 to 100 yards away. Sight through your Red Dot and use the windage and elevation adjustments to align the lighted reticle with the target as seen along the barrel. Each click of adjustment moves the point of impact by 1/2" at 100 yards, 1/4" at 50 yards, and 1/8" at 25 yards.

LITHIUM BATTERY REFERENCE CHART

Duracell	Sunrise/Radio Shack	NEDA Type (size)
DL2032	CR2032	5004L

Other brands of batteries not listed in the chart are available and suitable for use with your Red Dot. Refer to "coin cell" NEDA type when purchasing batteries or consult with your dealer.

CAUTION: BE SURE GUN IS NOT LOADED WHEN INSTALLING BATTERIES.

TECHNICAL SPECIFICATIONS:

Model Number:	R00004	R00904	R00005
Power:	1X	1X	1X
Dot Size:	3 Min Dot	3 Min Dot	5 Min Dot
Finish:	Matte Black	Silver	Matte Black
Weight:	4.7 oz / 134 g	4.7 oz / 134 g	4.7 oz / 134 g
Length:	4.5" / 11.5cm	4.5" / 11.5cm	4.5" / 11.5cm
Diameter:	1"	1"	30mm

Model Number:	R00905	R00006	R00906
Power:	1X	1X	1X
Dot Size:	5 Min Dot	3, 5, 8, 10 Min Multi-Dot	3, 5, 8, 10 Min Multi-Dot
Finish:	Silver	Matte Black	Silver
Weight:	4.7 oz / 134 g	4.7 oz / 134 g	4.7 oz / 134 g
Length:	4.5" / 11.5cm	4.5" / 11.5cm	4.5" / 11.5cm
Diameter:	30mm	30mm	30mm

INCLUDED ACCESSORIES:

Plastic Dust Caps (2), Rings (2), Hex Wrench, Sunshade, CR2032 Lithium Battery

TWO YEAR LIMITED WARRANTY

Congratulations on the purchase of your new Millett product. You have chosen one of the finest values available today. This product carries Millett's **TWO YEAR LIMITED WARRANTY**. This product is warranted against original defects in material and/or workmanship for the length of time specified by this warranty, provided, however, that the unit has not been abused, taken apart or tampered with in any way whatsoever.

This warranty is limited to the original purchaser and is not transferable. **This warranty applies only to products purchased in the United States of America.** Any return made under this warranty must be accompanied by the items listed below:

- 1) A check/money order in the amount of **\$10.00** to cover the cost of postage and handling
- 2) Name and address for product return
- 3) An explanation of the defect
- 4) Proof of Date Purchased
- 5) Product should be well packed in a sturdy outside shipping carton to prevent damage in transit, with return postage prepaid to the address listed below:

SEND TO:

MILLETT

Attn.: Repairs
9200 Cody
Overland Park, Kansas 66214

Millett shall not be liable for any consequential, incidental or contingent damages whatsoever. Some states do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

Non-warranty repairs or refurbishing of your Millett product are always provided at a reasonable cost.

For products purchased outside the United States please contact your local dealer for applicable warranty information.

©2010 B.O.P Millett, TM, ®, denote trademarks of B.O.P

Millett

©2010 B.O.P. Millett,™,®, denote trademarks of B.O.P.

www.millettsights.com

9200 Cody, Overland Park, KS 66214

1-800-423-3537